

DESCRIPTION:
SNAPNRACK, TDS, ULTRA RAIL ALL PURPOSE L
FOOT (90 DEG), BLACK (USA)

PART NUMBER(S):

242-01239-USA

UNITS: IN, LB, DEG [MM, KG, DEG]

SHEET: 1:2

DOC NUMBER:
SNR-DC-01424

DRAWN BY:
M.WATKINS

REV:

A

DATE:



6/12/2025

SnapNrack®

SNR SOLAR LLC

775 FIERO LANE, SUITE 200
SAN LUIS OBISPO, CA 93401 USA
EMAIL: CONTACT@SNAPNRACK.COM

THE INFORMATION IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY. ANY
REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PROHIBITED WITHOUT THE
WRITTEN CONSENT OF SNR SOLAR LLC.

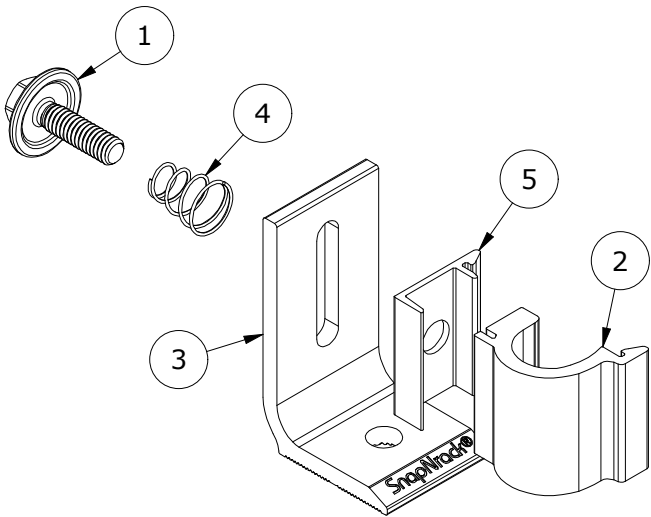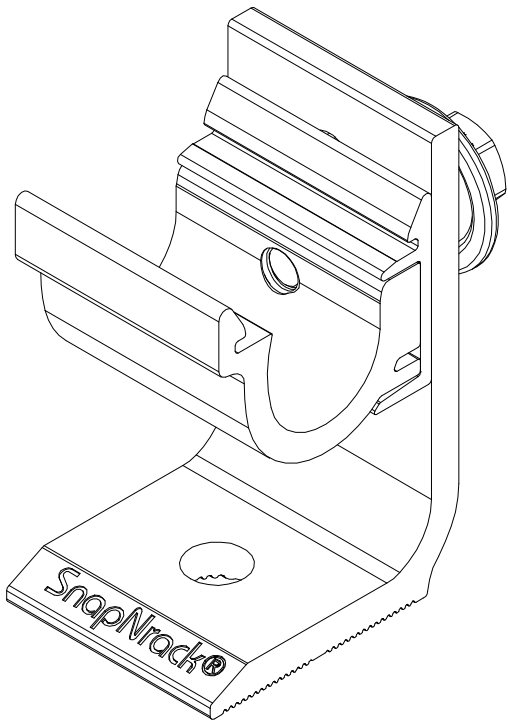

PARTS LIST

| ITEM | QTY | DESCRIPTION |
|------|-----|--|
| 1 | 1 | BOLT, WIDE FLANGE, RECESSED, 5/16IN-18 X 1IN, SS |
| 2 | 1 | SNAPNRACK, UR FLIP CLAMP, TAP, BLACK (USA) |
| 3 | 1 | SNAPNRACK, AP90 L FOOT II, BLACK (USA) |
| 4 | 1 | SNAPNRACK, ULTRA RAIL MOUNT SPRING, SS |
| 5 | 1 | SNAPNRACK, UR FLIP CLAMP, THRU, SILVER (USA) |

MATERIALS:

6000 SERIES ALUMINUM, STAINLESS STEEL

DESIGN LOAD (LBS):

405 UP, 788 DOWN, 213 SIDE

ULTIMATE LOAD (LBS):

N/A

TORQUE SPECIFICATION:

12 FT-LBS

CERTIFICATION:

UL 2703, FILE E359313

WEIGHT (LBS):

0.27

DESCRIPTION:
SNAPNRACK, TDS, ULTRA RAIL ALL PURPOSE L
FOOT (90 DEG), BLACK (USA)

PART NUMBER(S):

242-01239-USA

UNITS: IN, LB, DEG [MM, KG, DEG] SHEET: 2:2

DOC NUMBER:
SNR-DC-01424

DRAWN BY:
M.WATKINS

REV: DATE:
A 6/12/2025

SnapNrack®

SNR SOLAR LLC
775 FIERO LANE, SUITE 200
SAN LUIS OBISPO, CA 93401 USA
EMAIL: CONTACT@SNAPNRACK.COM
THE INFORMATION IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY. ANY
REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PROHIBITED WITHOUT THE
WRITTEN CONSENT OF SNR SOLAR LLC.

