

Solar Panel

User Guide


Model: PV200D

Contact Us:
www.bluettipower.com
service@bluettipower.com




User Guide

What is in the box

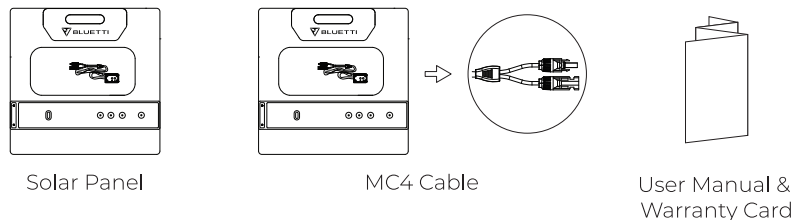


How to use


1 Unfold

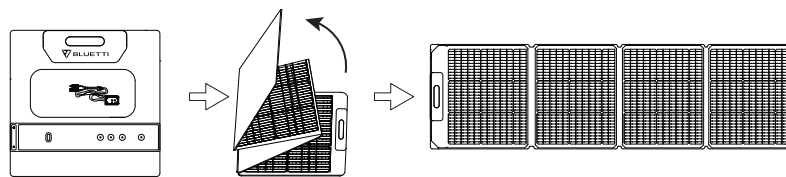

2 Adjust the kickstand

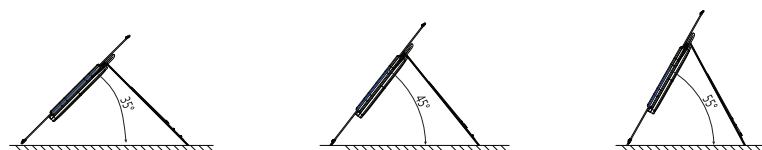

3 Connect to power station

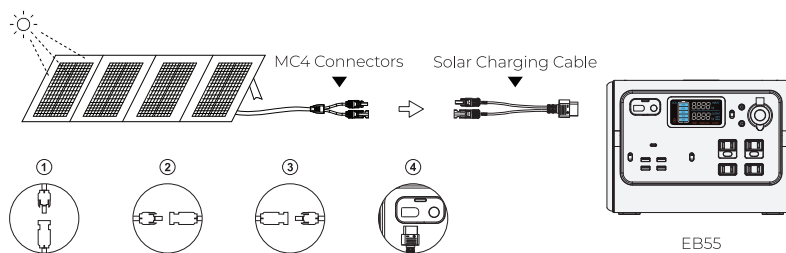


User Guide

Note:

Use ONLY ONE PV200D solar panel with EB3A,EB55.
Whether connected in series or parallel, make sure the total voltage of solar panels is under the power station's input voltage limit.

Attention

Regular inspection and maintenance are required to prolong the lifespan of solar panels.

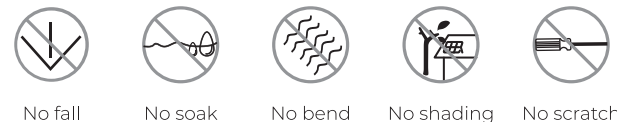

Warning:

Do not use solar panels in extreme weather conditions like thunderstorms, floods, typhoons, etc.
Always use solar panels within the specified temperature range (14-149°F/-10-65°C).

Technical details

PV200D		
Maximum Power(Pm)	200W*	
Solar Cell Lamination	ETFE	
Cell Efficiency	Up to 23.4%	
Voltage at Max Power(Vmp)	20.4V	
Current at Max Power(Imp)	9.7A	
Open Circuit Voltage(voc)	24.6V	
Short Circuit Current(Isc)	10.8A	
Operating Temperature	-10°C ~ +65°C	
Best Working Temperature	+25°C	
Folding Number	4	
General		
Weight	17.15lbs / 8.14Kg	
Dimensions	Unfolded	23.9*82.8in / 608*2105mm
	Folded	23*23.9*1.7in / 585*608*45mm
Warranty		
12 Months		

User Guide

* STC: Irradiation 1000W/m², cell temperature 25°C, atmospheric mass number AM 1.5, measurement tolerance ±3 % (Pm).

Frequently asked questions

Is the solar panel waterproof ?

No. The solar panel is IP65 water-resistant that provides protection against water splash. Please do not leave it in the rain or water for a long time.

What will affect the final conversion efficiency of solar panels ?

The actual solar panel efficiency may be affected by several factors, like weather, sun intensity, shading, panel orientation, temperature, location, dust and dirt. For example, if you live in a place without much sunlight or your panels are covered by shade, you'll get a very low output or none at all.

Is the BLUETTI's solar panel compatible with the third party's power station ?

Yes. Make sure BLUETTI solar panels' voltage is compatible with your power stations' voltage limit, while you're using the same connector. Please feel free to contact us for compatibility with other power stations.

EU REP

Company: POWEROAK GmbH
Address: Lise-Meitner-Str. 14 28816
Stuhr Germany
Mail: logi@bluetti.de

UK REP

Company: POWEROAK ENERGY UK CO.,LTD
Address: Unit 2, NorthGate, Bolsover Business Park,
Woodhouse Lane Chesterfield England S44 6BD
Mail: poweroak.eu@bluetti.com

