



# MIDI, MEGA and ANL fuses, and fuse holders


[www.victronenergy.com](http://www.victronenergy.com)

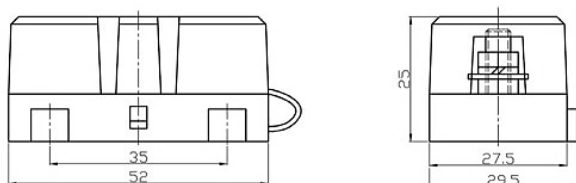


Fuse holder for MIDI fuse




MIDI fuse

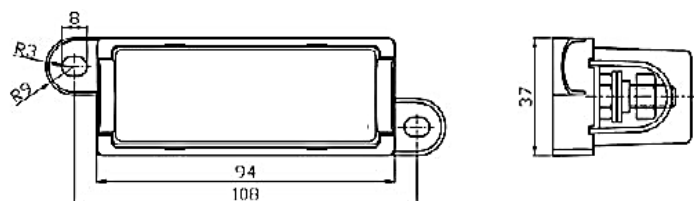


Fuse holder for MEGA fuse

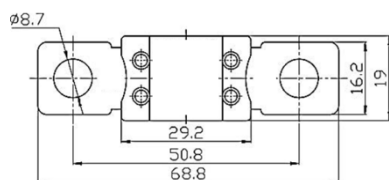

MEGA fuse

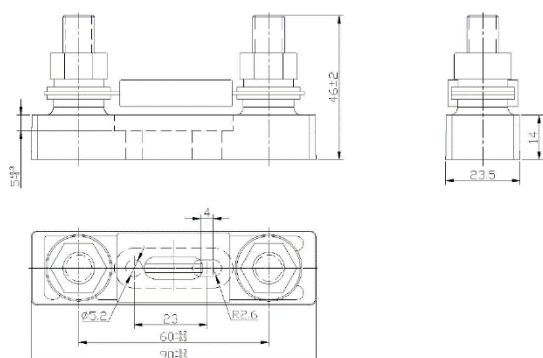

Fuse holder for ANL fuse

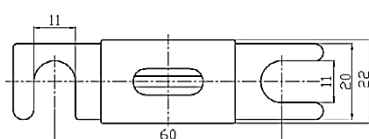

ANL fuse

| MIDI fuses 32V      | Appr. voltage drop | Cold resistance |
|---------------------|--------------------|-----------------|
| MIDI fuse 60A/32V   | 70 mV              | 0,9 mΩ          |
| MIDI fuse 80A/32V   | 60 mV              | 0,55 mΩ         |
| MIDI fuse 100A/32V  | 60 mV              | 0,45 mΩ         |
| MIDI fuse 125A/32V  | 60 mV              | 0,30 mΩ         |
| MIDI fuse 150A/32V  | 80 mV              | 0,30 mΩ         |
| MIDI -fuse 200A/32V | 80 mV              | 0,25 mΩ         |
| MIDI fuses 58V      | Appr. voltage drop | Cold resistance |
| MIDI fuse 30A/58V   | 65 mV              | 2 mΩ            |
| MIDI fuse 40A/58V   | 65 mV              | 1,4 mΩ          |
| MIDI fuse 50A/58V   | 65 mV              | 1 mΩ            |
| MIDI fuse 60A/58V   | 70 mV              | 0,9 mΩ          |
| MIDI fuse 80A/58V   | 70 mV              | 0,42 mΩ         |
| MIDI fuse 100A/58V  | 70 mV              | 0,45 mΩ         |

| MEGA fuses 32V     | Appr. voltage drop | Cold resistance |
|--------------------|--------------------|-----------------|
| MEGA fuse 60A/32V  | 120 mV             | 1,5 mΩ          |
| MEGA fuse 80A/32V  | 90 mV              | 0,7 mΩ          |
| MEGA fuse 100A/32V | 90 mV              | 0,6 mΩ          |
| MEGA fuse 125A/32V | 90 mV              | 0,4 mΩ          |
| MEGA fuse 150A/32V | 90 mV              | 0,38 mΩ         |
| MEGA fuse 175A/32V | 90 mV              | 0,3 mΩ          |
| MEGA fuse 200A/32V | 80 mV              | 0,25 mΩ         |
| MEGA fuse 225A/32V | 80 mV              | 0,22 mΩ         |
| MEGA fuse 250A/32V | 80 mV              | 0,2 mΩ          |
| MEGA fuse 300A/32V | 80 mV              | 0,17 mΩ         |
| MEGA fuse 400A/32V | 70 mV              | 0,13 mΩ         |
| MEGA fuse 500A/32V | 70 mV              | 0,1 mΩ          |

| MEGA fuses 58V     | Appr. voltage drop | Cold resistance |
|--------------------|--------------------|-----------------|
| MEGA fuse 125A/58V | 90 mV              | 0,4 mΩ          |
| MEGA fuse 200A/58V | 80 mV              | 0,25 mΩ         |
| MEGA fuse 250A/58V | 80 mV              | 0,2 mΩ          |
| MEGA fuse 300A/58V | 80 mV              | 0,17 mΩ         |

| MEGA fuses 80V     | Appr. voltage drop | Cold resistance |
|--------------------|--------------------|-----------------|
| MEGA fuse 40A/80V  | 135 mV             | 1,459 mΩ        |
| MEGA fuse 60A/80V  | 135 mV             | 1,017 mΩ        |
| MEGA fuse 80A/80V  | 110 mV             | 0,716 mΩ        |
| MEGA fuse 100A/80V | 110 mV             | 0,868 mΩ        |
| MEGA fuse 125A/80V | 110 mV             | 0,653 mΩ        |
| MEGA fuse 150A/80V | 110 mV             | 0,332 mΩ        |
| MEGA fuse 175A/80V | 110 mV             | 0,282 mΩ        |
| MEGA fuse 200A/80V | 110 mV             | 0,253 mΩ        |
| MEGA fuse 225A/80V | 110 mV             | 0,235 mΩ        |
| MEGA fuse 250A/80V | 110 mV             | 0,208 mΩ        |
| MEGA fuse 300A/80V | 80 mV              | 0,171 mΩ        |
| MEGA fuse 400A/80V | 80 mV              | 0,128 mΩ        |
| MEGA fuse 500A/80V | 80 mV              | 0,106 mΩ        |

| ANL fuses 80V     | Appr. voltage drop | Cold resistance |
|-------------------|--------------------|-----------------|
| ANL fuse 300A/80V | 125 mV             | 0,18 mΩ         |
| ANL fuse 400A/80V | 125 mV             | 0,16 mΩ         |
| ANL fuse 500A/80V | 100 mV             | 0,25 mΩ         |