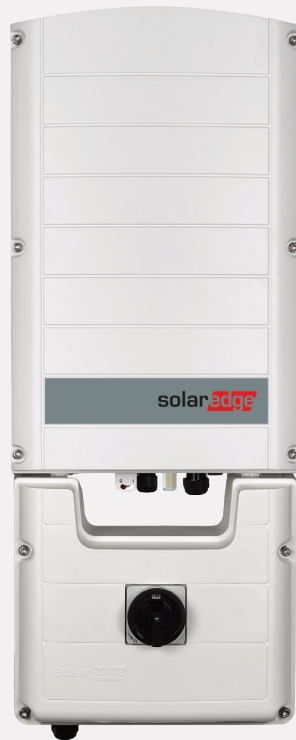

Three Phase Inverters for the 277/480V Grid for North America

SE20KUS / SE30KUS / SE33.3KUS

INVERTERS



The best choice for SolarEdge enabled systems

- Quick and easy inverter commissioning directly from a smartphone using the SolarEdge SetApp
- Specifically designed to work with power optimizers
- Superior efficiency (98%)
- Fixed voltage inverter for longer strings
- Integrated Safety Switch
- UL1741 SA certified, for CPUC Rule 21 grid compliance
- Integrated arc fault protection and rapid shutdown for NEC 2014 and 2017, per article 690.11 and 690.12
- Built-in module-level monitoring
- Internet connection through Ethernet or Wireless
- Small, lightweight, and easy to install outdoors or indoors on provided bracket
- Supplied with RS485 Surge Protection Device, to better withstand lightning events

solaredge

/ Three Phase Inverters for the 277/480V Grid⁽¹⁾ for North America

SE20KUS / SE30KUS / SE33.3KUS

MODEL NUMBER	SE20KUS	SE30KUS	SE33.3KUS	
APPLICABLE TO INVERTERS WITH PART NUMBER		SEXXX-XXXXXBXX4		
OUTPUT				
Rated AC Power Output	20000	30000	33300	VA
Maximum AC Power Output	20000	30000	33300	VA
Output Line Connections	3 phase, 4-wire / PE (L1-L2-L3-N), TN, TT			
AC Output Voltage Minimum-Nominal-Maximum ⁽²⁾ (L-N)	244-277-305			Vac
AC Output Voltage Minimum-Nominal-Maximum ⁽²⁾ (L-L)	422.5-480-529			Vac
AC Frequency Min-Nom-Max ⁽²⁾	59.3 - 60 - 60.5			Hz
Maximum Continuous Output Current (per Phase)	24	36.5	40	A
GFDI Threshold	1			A
Utility Monitoring, Islanding Protection, Country Configurable Set Points	Yes			
THD	≤ 3			%
INPUT				
Maximum DC Power (Module STC)	27000	40500	45000	W
Transformer-less, Ungrounded	Yes			
Maximum Input Voltage DC to Gnd	490			Vdc
Maximum Input Voltage DC+ to DC-	1000			Vdc
Nominal Input Voltage DC to Gnd	420			Vdc
Nominal Input Voltage DC+ to DC-	850			Vdc
Maximum Input Current	26.5	39	40	Adc
Maximum Input Short Circuit Current	45			Adc
Reverse-Polarity Protection	Yes			
Ground-Fault Isolation Detection	1MΩ Sensitivity	350kΩ Sensitivity ⁽³⁾		
CEC Weighted Efficiency	98	98.5		%
Night-time Power Consumption	< 3	< 4		W
ADDITIONAL FEATURES				
Supported Communication Interfaces	RS485, Ethernet, Built-in Cellular (optional)			
Inverter Commissioning	With the SetApp mobile application using built-in access point for local connection			
Rapid Shutdown – NEC 2014 and 2017 690.12	Automatic Rapid Shutdown upon AC Grid Disconnect ⁽⁴⁾			
RS485 Surge Protection Plug-in	Supplied with the inverter			
Smart Energy Management	Export Limitation			
STANDARD COMPLIANCE				
Safety	UL1741, UL1741 SA, UL1699B, CSA C22.2, Canadian AFCI according to T.I.L. M-07			
Grid Connection Standards	IEEE1547, Rule 21, Rule 14 (HI)			
Emissions	FCC part15 class B			
INSTALLATION SPECIFICATIONS				
AC output conduit size / AWG range	3/4" minimum / 12-6 AWG	3/4" minimum / 8-4 AWG		
DC input conduit size / AWG range	3/4" minimum / 12-6 AWG			
Number of DC inputs	2 pairs	3 pairs ⁽⁴⁾		
Dimensions (H x W x D)	21 x 12.5 x 10.5 / 540 x 315 x 260			in / mm
Dimensions with Safety Switch (H x W x D)	30.5 x 12.5 x 10.5 / 775 x 315 x 260			in / mm
Weight	73.2 / 33.2	93.6 / 42.5		lb / kg
Weight with Safety Switch	79.7 / 36.2	100.3 / 45.5		lb / kg
Cooling	Fans (user replaceable)			
Noise	< 50	< 55		dBA
Operating Temperature Range	-40 to +140 / -40 to +60 ⁽⁵⁾			°F / °C
Protection Rating	NEMA 3R			