


SILFAB PRIME NTC

SIL-420/430 QD

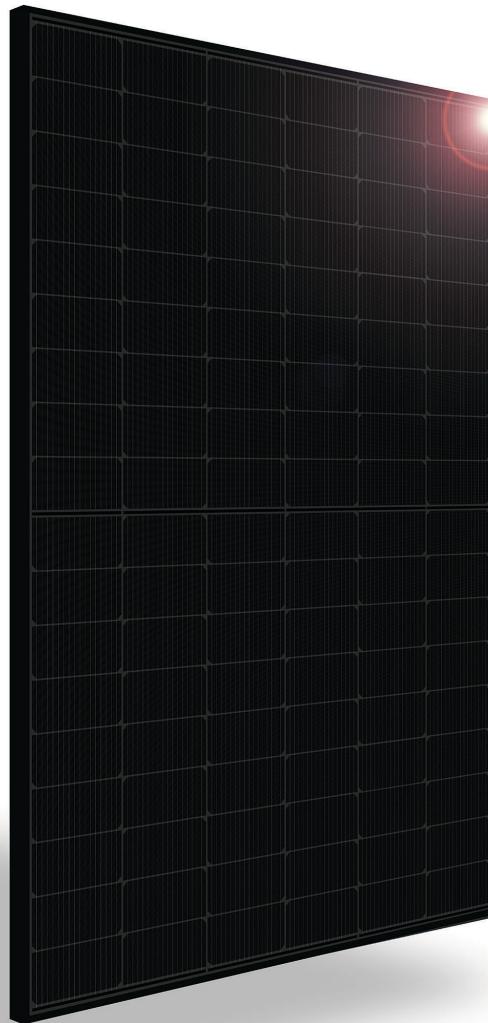

• SOLAR TECHNOLOGY REIMAGINED
FOR TODAY'S WORLD

Silfab's breakthrough in advanced N-type solar cell technology delivers premium all-black solar panels of unmatched performance and reliability.

SILFABSOLAR.COM



* Chubb provides error and omission insurance to Silfab Solar Inc.

ELECTRICAL SPECIFICATIONS		420		430	
Test Conditions		STC	NOCT	STC	NOCT
Module Power (Pmax)	Wp	420	313	430	321
Maximum power voltage (Vpmax)	V	32.87	30.55	33.07	30.74
Maximum power current (Ipmax)	A	12.78	10.25	13.01	10.43
Open circuit voltage (Voc)	V	37.68	35.34	37.76	35.42
Short circuit current (Isc)	A	13.51	10.89	13.81	11.14
Module efficiency	%	21.5%	20.1%	22.1%	20.6%
Maximum system voltage (VDC)	V		1000		
Series fuse rating	A		25		
Power Tolerance	Wp		0 to +10		

Measurement conditions: STC 1000 W/m² • AM 1.5 • Temperature 25 °C • NOCT 800 W/m² • AM 1.5 • Measurement uncertainty ≤ 3%

Sun simulator calibration reference modules from Fraunhofer Institute. Electrical characteristics may vary by ±5% and power by 0 to +10 W.

MECHANICAL PROPERTIES / COMPONENTS		METRIC	IMPERIAL
Module weight		21 kg ± 0.2 kg	46.3 lbs ± 0.4 lbs
Dimensions (H x L x D)		1721 mm x 1133 mm x 35 mm	67.8 in x 44.6 in x 1.37 in
Maximum surface load (wind/snow)*		TBD	TBD
Hail impact resistance		ø 25 mm at 83 km/h	ø 1 in at 51.6 mph
Cells		108 Half cells - TOPCon (N-Type) Silicon solar cell 182 mm x 91 mm	108 Half cells - TOPCon (N-Type) Silicon solar cell 7.16 in x 3.58 in
Glass		3.2 mm high transmittance, tempered, antireflective coating	0.126 in high transmittance, tempered, antireflective coating
Cables and connectors (refer to installation manual)		1350 mm, ø 5.7 mm, MC4 from Staubli	53.1 in, ø 0.22 in (12 AWG), MC4 from Staubli
Backsheet		High durability, superior hydrolysis and UV resistance, multi-layer dielectric film, fluorine-free PV backsheet	
Frame		Anodized aluminum (Black)	
Bypass diodes		3 diodes-30SQ045T (45 V max DC blocking voltage, 30 A max forward rectified current)	
Junction Box		UL 3730 Certified, IEC 62790 Certified, IP68 rated	

TEMPERATURE RATINGS		WARRANTIES	
Temperature Coefficient Isc	+0.064 %/°C	Module product workmanship warranty	25 years**
Temperature Coefficient Voc	-0.28 %/°C	Linear power performance guarantee	30 years
Temperature Coefficient Pmax	-0.36 %/°C		≥ 98% end 1st yr
NOCT (± 2 °C)	45 °C		≥ 94.7% end 12th yr
Operating temperature	-40/+85 °C		≥ 90.8% end 25th yr
			≥ 89.3% end 30th yr


CERTIFICATIONS		SHIPPING SPECS	
Product	UL 61215***, UL 61730***, CSA C22.2#61730***, IEC 61215***, IEC 61730***, IEC 61701 (Salt Mist Corrosion), IEC 62716 (Ammonia Corrosion), CEC Listing***, UL Fire Rating: Type 2	Modules Per Pallet:	26 or 26 (California)
Factory	ISO9001:2015	Pallets Per Truck	32 or 30 (California)
		Modules Per Truck	832 or 780 (California)

* ▲ Warning. Read the Safety and Installation Manual for mounting specifications and before handling, installing and operating modules.

** 12 year extendable to 25 years subject to registration and conditions outlined under "Warranty" at silfabsolar.com.

PAN files generated from 3rd party performance data are available for download at: silfabsolar.com/downloads.

*** Certification and CEC listing in progress.

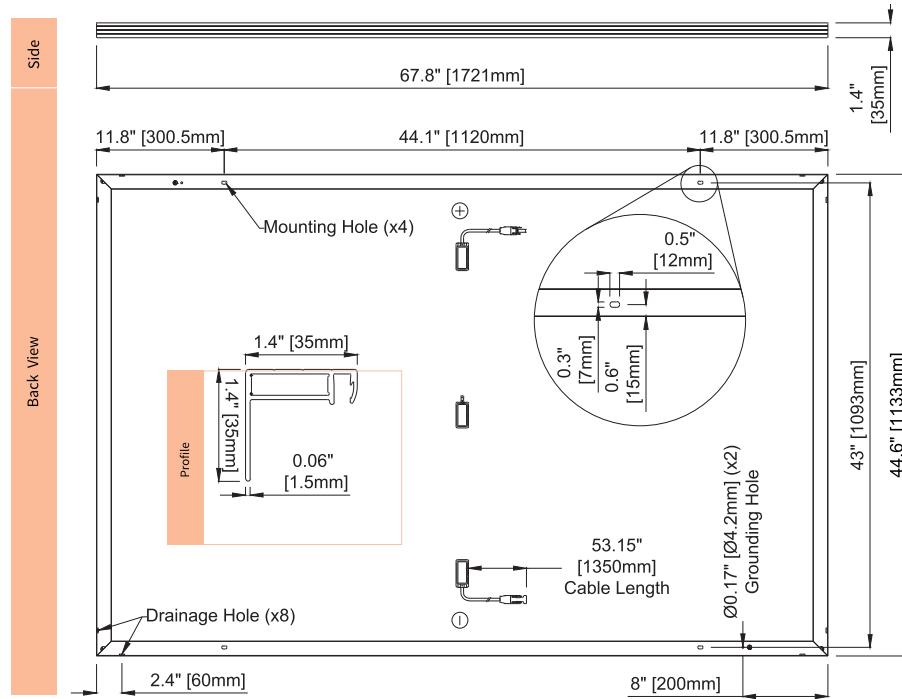

SILFAB SOLAR INC.

800 Cornwall Ave
Bellingham WA 98225 USA

T +1 360.569.4733

info@silfabsolar.com

SILFABSOLAR.COM

1770 Port Drive
Burlington WA 98233 USA
T +1 360.569.4733

240 Courtneypark Drive East
Mississauga ON L5T 2Y3 Canada
T +1 905.255.2501

F +1 905.696.0267

Silfab - SIL-420/430-QD-20230817

No reproduction of any kind is allowed without permission. Data and information is subject to modifications without notice. © Silfab Solar Inc., 2023. Silfab Solar® is a registered trademark of Silfab Solar Inc.