

SolarEdge Fast Mount 14

For North America

SFM14



Seamlessly bridge legacy and new SolarEdge Home Hub inverters with the SolarEdge Fast Mount 14

- ✓ Retrofit legacy SolarEdge inverters without moving existing conduits and wiring
- ✓ Bottom, side, and rear entry to accommodate existing conduits
- ✓ Reduce time, cost, and labor by quickly connecting the SolarEdge Home Hub Inverter
- ✓ Pre-fitted knockouts to align the inverter faster
- ✓ Integrated mounting template for measuring ease
- ✓ Additional savings from included connection hardware
- ✓ Integrated 10-slot bar for conduit grounding
- ✓ Refined design aligns seamlessly with integrated SolarEdge Home products


/ SolarEdge Fast Mount 14

For North America

SFM14

		Units
INSTALLATION SPECIFICATIONS		
Dimensions (W x H x D)	14.33 x 7.7 x 7	in
Weight	7.94	lbs
Ambient Temperature Range	-40 to +140	°F
Mounting	Flush mount to the wall (Option A) or using spacers (Option B)	
CONSTRUCTION		
Material	Flame retardant, rigid polycarbonate diecast	
STANDARD COMPLIANCE		
Safety	UL 1741; NEMA Type 3R	

MECHANICAL DRAWING – TOP VIEW

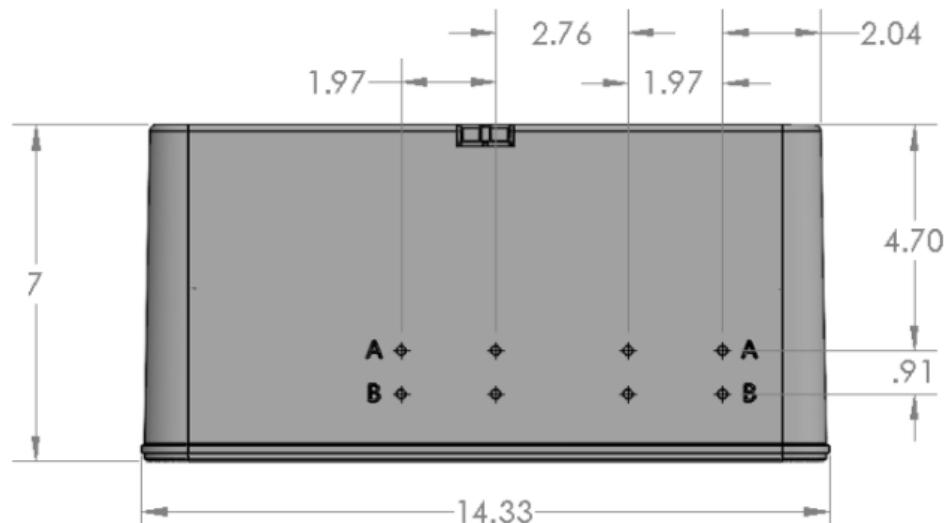

MECHANICAL DRAWING – BACK VIEW

