



BACKSHEET MONOCRYSTALLINE MODULE

PRODUCT: TSM-NE09RC.05

PRODUCT RANGE: 380-430W

430W


MAXIMUM POWER OUTPUT

0~+5W

POSITIVE POWER TOLERANCE

21.5%

MAXIMUM EFFICIENCY

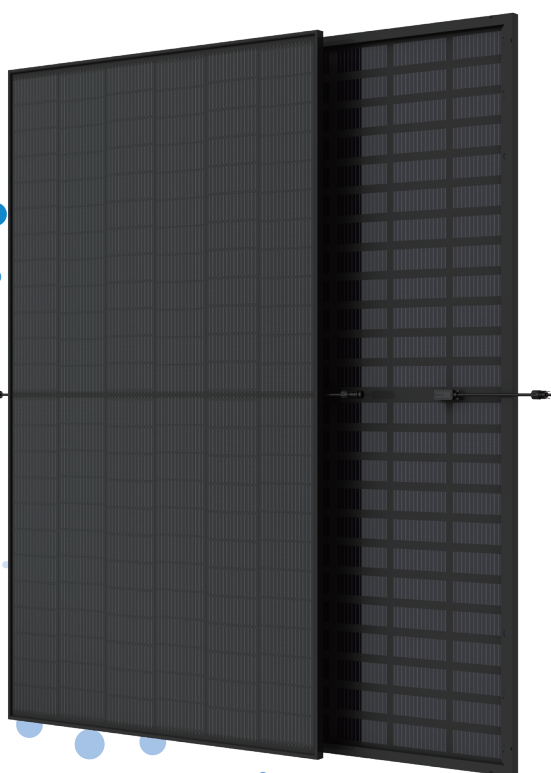

Small in size, bigger on power

- Up to 430W, 21.5% module efficiency with high density interconnect technology
- Reduce installation cost with higher power bin and efficiency
- Boost performance in warm weather with low temperature coefficient and operating temperature



High Reliability

- Innovative non-destructive cutting for improved mechanical resistance and strength
- Excellent fire rating, weather resistance, salt spray, sand dust, ammonia performance which is fully applicable in coastal, high temperature, humidity area and harsh environment



Ultra-low Degradation, longer warranty, higher output


- First-year degradation 1% and annual degradation at 0.4%
- Up to 25 years product warranty and 25 years power warranty



Universal solution for residential and C&I rooftops

- Easy for integration, designed for compatibility with existing mainstream inverters and diverse mounting systems
- Perfect size and low weight for handling and installation
- Most valuable solution on low load capacity rooftops (weight similar to backsheet version)
- Mechanical performance up to 6000 Pa positive load and 4000 Pa negative load

Trina Solar's Vertex Bifacial Backsheet Performance Warranty

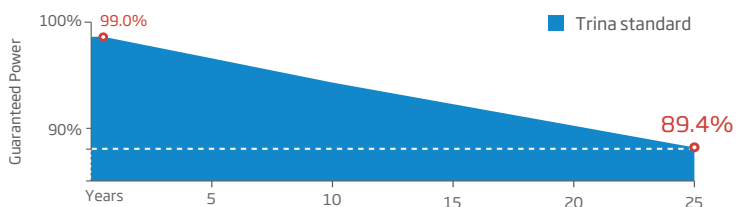

Comprehensive Products and System Certificates



IEC61215/IEC61730/IEC61701/IEC62716/UL61730

ISO 9001: Quality Management System




ISO 14001: Environmental Management System

ISO14064: Greenhouse Gases Emissions Verification

ISO45001: Occupational Health and Safety Management System



DIMENSIONS OF PV MODULE(mm)

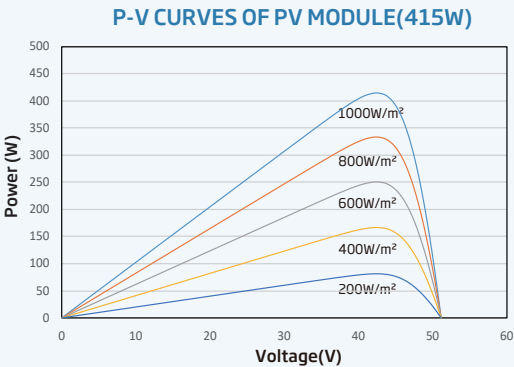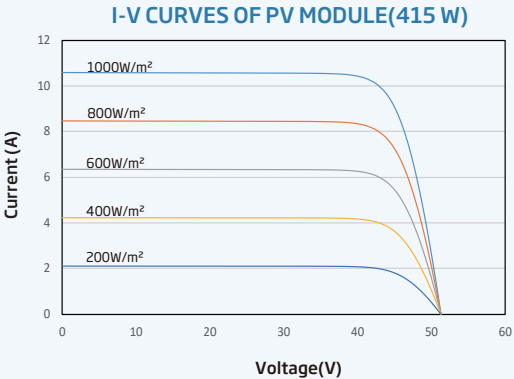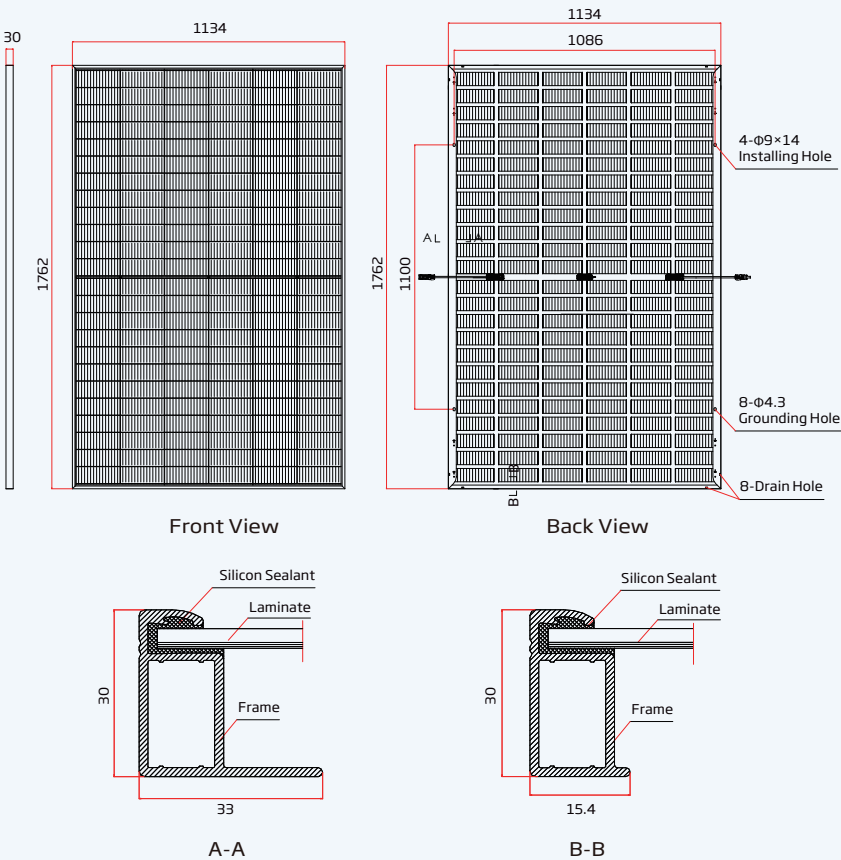

ELECTRICAL DATA (STC)

Peak Power Watts -P _{MAX} (Wp)*	380	385	390	395	400	405	410	415	420	425	430
Power Tolerance-P _{MAX} (W)	0 ~ +5										
Maximum Power Voltage-V _{MPP} (V)	39.8	40.2	40.6	41.0	41.3	41.7	42.1	42.5	42.8	43.2	43.6
Maximum Power Current-I _{MPP} (A)	9.54	9.57	9.73	9.77	9.68	9.71	9.73	9.77	9.80	9.84	9.87
Open Circuit Voltage-V _{OC} (V)	47.5	48.0	48.4	48.8	49.2	49.6	50.1	50.5	50.9	51.4	51.8
Short Circuit Current-I _{SC} (A)	10.15	10.19	10.22	10.26	10.30	10.33	10.37	10.40	10.43	10.47	10.50
Module Efficiency _{η_m} (%)	19.0	19.3	19.5	19.8	20.0	20.3	20.5	20.8	21.0	21.3	21.5

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%.

Electrical characteristics with different power bin (reference to 10% Irradiance ratio)

Total Equivalent power -P _{MAX} (Wp)	389	394	399	405	426	431	437	442	447	453	458
Maximum Power Voltage-V _{MPP} (V)	38.7	39.1	39.5	39.8	41.3	41.7	42.1	42.5	42.8	43.2	43.6
Maximum Power Current-I _{MPP} (A)	10.05	10.09	10.13	10.16	10.31	10.34	10.36	10.41	10.44	10.48	10.51
Open Circuit Voltage-V _{OC} (V)	47.1	47.1	47.1	47.5	49.2	49.6	50.1	50.5	50.9	51.4	51.8
Short Circuit Current-I _{SC} (A)	10.71	10.74	10.78	10.81	10.97	11.00	11.04	11.08	11.11	11.15	11.18
Irradiance ratio (rear/front)	10%										

Power Bifaciality:65±10%.

ELECTRICAL DATA (NOCT)

Maximum Power-P _{MAX} (Wp)	289	293	296	301	312	308	312	316	319	324	328
Maximum Power Voltage-V _{MPP} (V)	37.2	37.6	37.9	38.3	38.6	39.0	39.3	39.7	40.0	40.4	40.7
Maximum Power Current-I _{MPP} (A)	7.76	7.80	7.82	7.86	7.88	7.91	7.93	7.96	7.98	8.01	8.04
Open Circuit Voltage-V _{OC} (V)	45.0	45.5	45.9	46.3	46.6	47.0	47.5	47.8	48.2	48.7	49.1
Short Circuit Current-I _{SC} (A)	8.18	8.21	8.24	8.27	8.30	8.32	8.36	8.38	8.41	8.44	8.46

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Topcon Bifacial
No. of cells	144cells
Module Dimensions	1762×1134×30 mm (69.37×44.65×1.18 inches)
Weight	21.3kg (47.0 lb)
Front Glass	3.2 mm (0.12inches), High Transmission, Tempered Glass
Encapsulant material	POE/EVA
BackSheet	Black Grid Transparent Backsheet
Frame	30mm (1.18 inches) Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²) Landscape:N 1100 mm/ P1100 mm(43.31/43.31 inches)
Connector	MC4 EV02
Fire Type	Type 1 or Type2

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P _{MAX}	-0.30%/°C
Temperature Coefficient of V _{OC}	-0.24%/°C
Temperature Coefficient of I _{SC}	0.04%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	25 A

WARRANTY

25 year Product Workmanship Warranty
25 year Power Warranty
1% first year degradation
0.4% Annual Power Attenuation

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 36 pieces
Modules per 40' container: 792 pieces
Pallet dimensions (L x W x H): 1800 x 1135 x 1259 mm
Pallet weight: 829 kg (1827 lb)