

Never Deal With Caulking Again!


Install with InstaFlash. Factory-installed, non-hardening sealant. Works on wet or dry roofs, 0° to 170°F.

Save Money!

Use scrap rail.
Eliminate waste.
Reduce SKUs.

Speed Installation

Pre-assembled components.
Level array without removing panels.

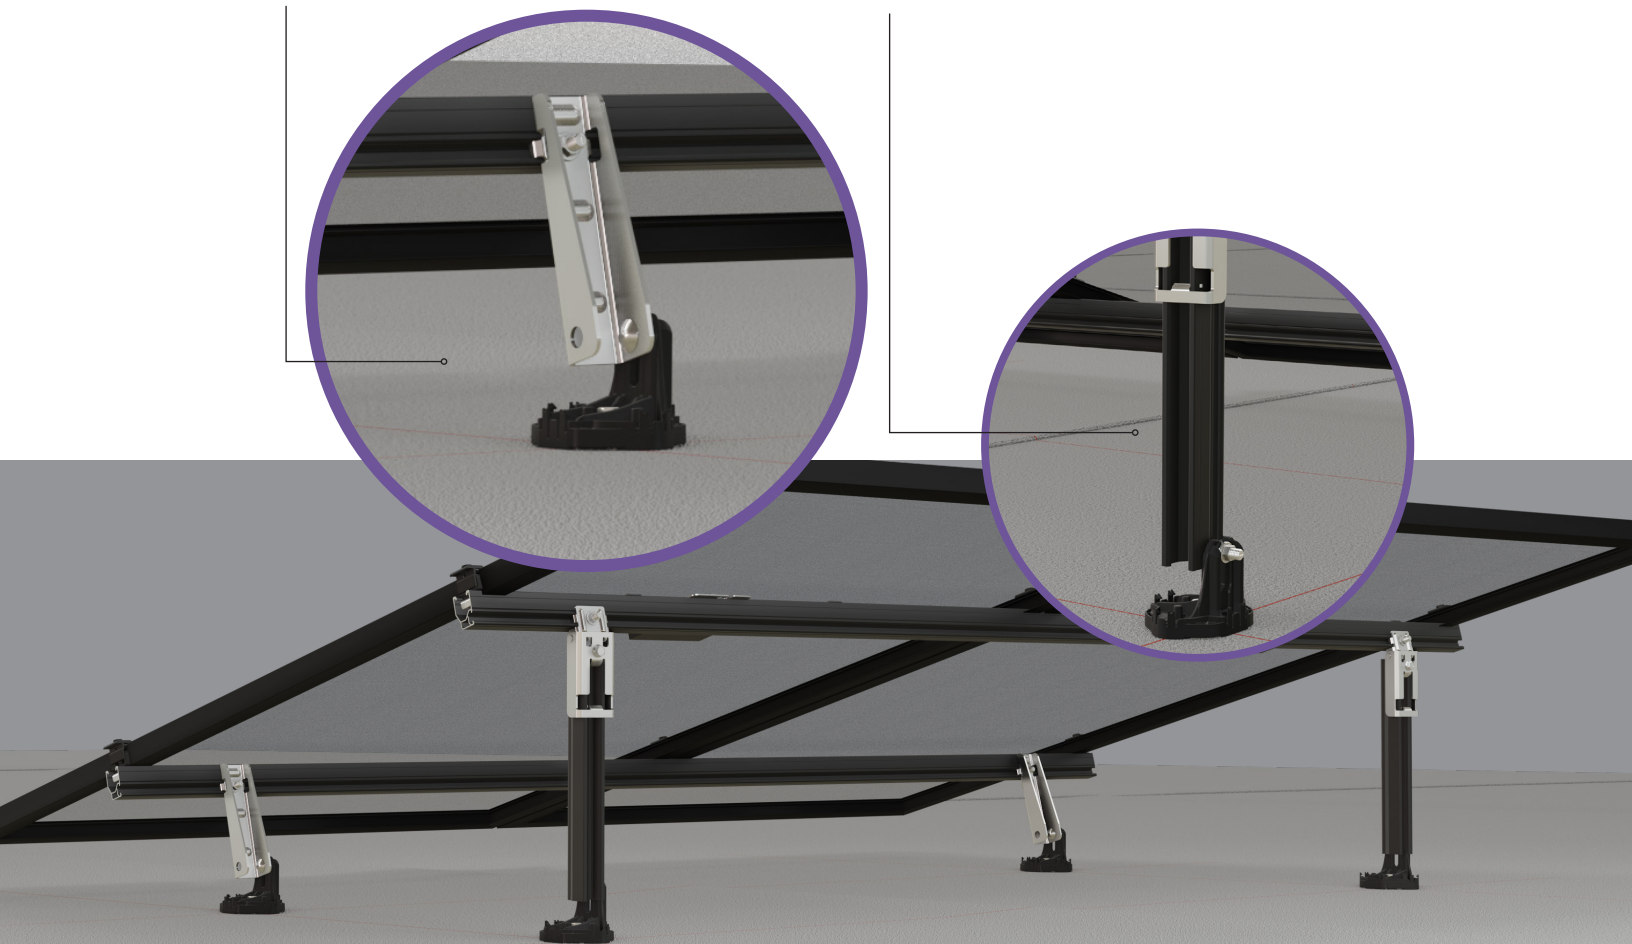

Next-Level Mounting for Flat Roofs



Save Money, No Waste

Use scrap Pegasus Rail or Pegasus Max Rail for Tilt Leg
Reduce SKU's



Code Compliant

Fully IBC/CBC Code Compliant
Exceeds ASCE 7-16 Standards
UL2703 Certified






Adjustable and Flexible

Rated for installation
angles of 0 to 35 degrees





25-Year Warranty




Manufactured with advanced
materials and coatings to
outlast the roof itself

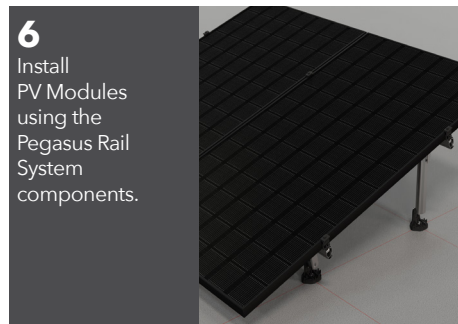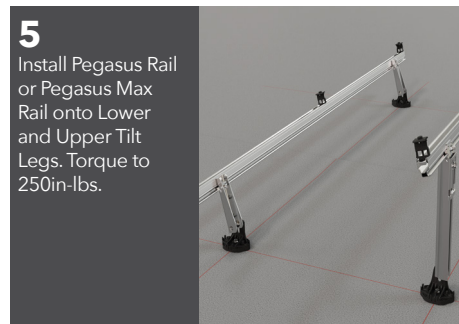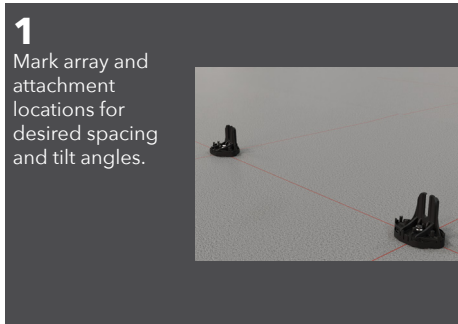

Upper Tilt Leg Assembly




Lower Tilt Leg Assembly



Pegasus Design Tool

Use Pegasus Design tool to rapidly plan arrays, calculate spacing, spans and leg lengths, and generate full permit packs.

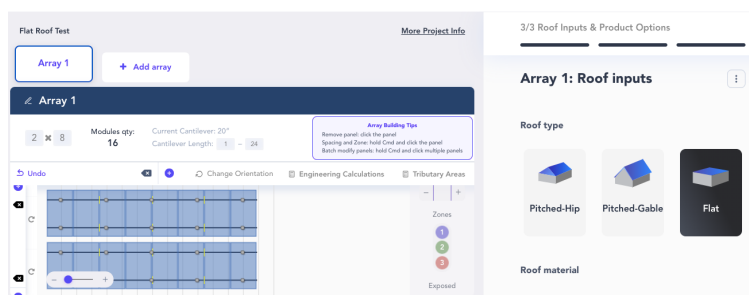

SPECIFICATIONS		INSTATILT
SKU		PSR-ITLT
Roof Type		Flat: 0 to 7 degrees, Compatible Roof Materials: Rolled Comp, BUR
Tilt Angles		0-35 Degrees
Compatible Scrap Rail		Pegasus Rail, Pegasus Max Rail
Flashing Type		Pegasus InstaFlash
Certifications		IBC, ASCE/SEI 7-16, UL2703
Kit Quantity		24
Kit Contents		Upper and Lower Tilt Leg Brackets



SCAN FOR INFO



SCAN FOR FREE SAMPLE

See www.PS-IP.com for intellectual property details. All rights reserved, ©2024 Pegasus Solar Inc.