



Series	FLA SERIES 4000	Warranty	3 Years
Volts	6	Design	L16
Cells	3	Plates/Cell	17
Terminal Type	LT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		
Cables	Optional: 19" 4/0 interconnect cable		

### Charge | Discharge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current	50 A
Maximum Charge Current	85 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	1040
Marine Crank Amps (MCA) 32°F / 0°C	1299
Reserve Capacity (RC @ 25A)	861 Minutes
Reserve Capacity (RC @ 75A)	226 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>512 AH</b>	<b>5.12 A</b>
@ 72 Hour Rate	<b>498 AH</b>	<b>6.92 A</b>
@ 50 Hour Rate	<b>481 AH</b>	<b>9.61 A</b>
@ 20 Hour Rate	<b>445 AH</b>	<b>22.25 A</b>
@ 15 Hour Rate	<b>418 AH</b>	<b>27.89 A</b>
@ 10 Hour Rate	<b>401 AH</b>	<b>40.05 A</b>
@ 8 Hour Rate	<b>383 AH</b>	<b>47.84 A</b>
@ 5 Hour Rate	<b>356 AH</b>	<b>71.20 A</b>
@ 1 Hour Rate	<b>209 AH</b>	<b>209.15 A</b>

### Specifications


Weight	55.5 kg	122.5 lbs
Length	318 mm	12.5"
Width	181 mm	7.13"
Height Incl. Term.	425.5 mm	16.75"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Electrolyte Reserve	57 mm	2.25"
Container	High Density Polypropylene	
Cover	High Density Polypropylene	
Handles	Rope / Plastic Handle	

- Plastics are UL94 HB (UL94-V2 available)
- Plastics are impact copolymer rated to ASTM D256, D5420
- Vented design with integral flame arrestor vent caps

### Cycle Life vs. Depth of Discharge

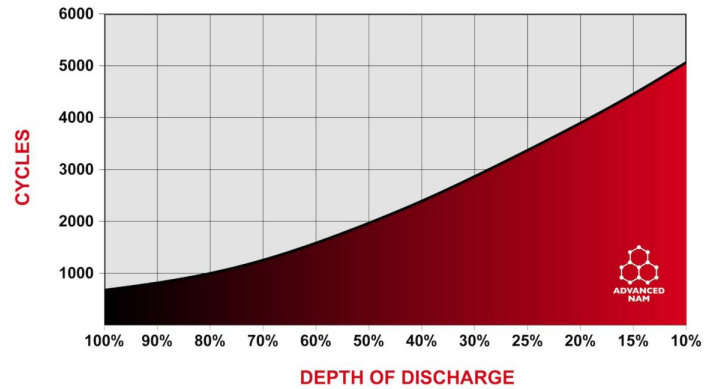

### Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

### Detailed Illustration

