

VSUN545-144BMH-DG

545W

Highest power output

21.32%


Module efficiency

12years

Material & Workmanship warranty

30years

Linear power output warranty

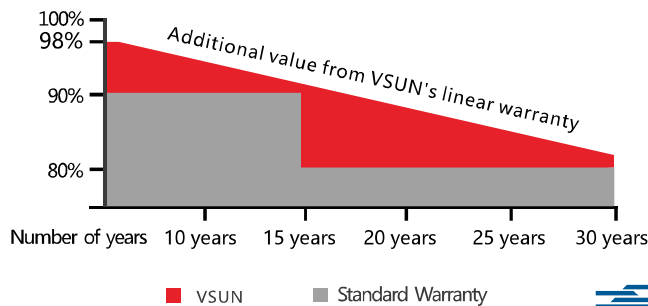

■ VSUN

■ Standard Warranty

Munich RE



MBB technology with Circular Ribbon



Higher output power



Half-cell Technology



Positive tolerance offer



Micro Gap



Up to 30% extra power generation yield from the back side




Fire safety: Class A



Load certificates: wind to 2400Pa and snow to 5400Pa



Lower LCOE

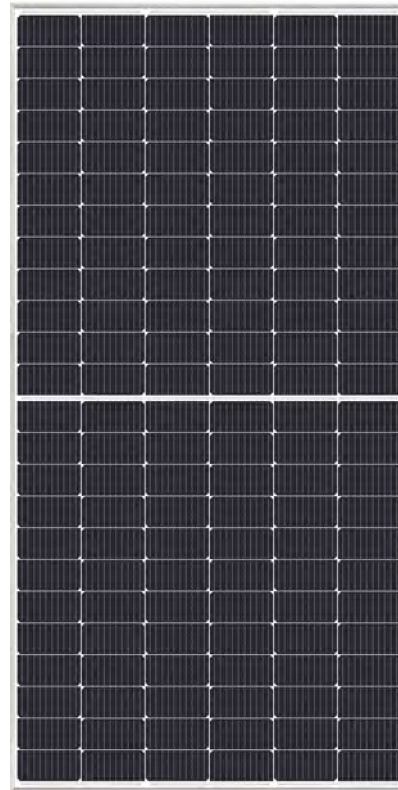

VSUN, a BNEF Tier-1 PV module manufacturer invested by Fuji Solar, has been committed to providing greener, cleaner and more intelligent renewable energy solutions. VSUN is dedicated to bringing reliable, customized and high-efficient products into various markets and customers worldwide



Electrical Characteristics at Standard Test Conditions(STC)

| Module Type | VSUN545-144BMH-DG | VSUN540-144BMH-DG | VSUN535-144BMH-DG | VSUN530-144BMH-DG |
|----------------------------------|-------------------|-------------------|-------------------|-------------------|
| Maximum Power - Pmax (W) | 545 | 540 | 535 | 530 |
| Open Circuit Voltage - Voc (V) | 49.81 | 49.65 | 49.5 | 49.35 |
| Short Circuit Current - Isc (A) | 13.92 | 13.85 | 13.78 | 13.71 |
| Maximum Power Voltage - Vmpp (V) | 41.8 | 41.65 | 41.5 | 41.35 |
| Maximum Power Current - Imp (A) | 13.04 | 12.97 | 12.9 | 12.82 |
| Module Efficiency | 21.32% | 21.13% | 20.93% | 20.74% |

Standard Test Conditions (STC): irradiance 1,000 W/m²; AM 1.5; module temperature 25°C. Pmax Sorting : 0~5W. Measuring Tolerance: ±3%.

Remark: Electrical data do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

Electrical Characteristics with different rear side power gain(reference to 540 front)

| Pmax (W) | Voc (V) | Isc (A) | Vmpp (V) | Imp (A) | Pmax gain |
|----------|---------|---------|----------|---------|-----------|
| 567 | 49.65 | 14.54 | 41.65 | 13.62 | 5% |
| 594 | 49.65 | 15.24 | 41.65 | 14.27 | 10% |
| 648 | 49.75 | 16.62 | 41.61 | 15.56 | 20% |
| 675 | 49.75 | 17.31 | 41.61 | 16.21 | 25% |

Temperature Characteristics

| | |
|---------------------------------|------------|
| NOCT | 45°C(±2°C) |
| Voltage Temperature Coefficient | -0.27%/°C |
| Current Temperature Coefficient | +0.048%/°C |
| Power Temperature Coefficient | -0.32%/°C |

Maximum Ratings

| | |
|----------------------------|---------|
| Maximum System Voltage [V] | 1500 |
| Series Fuse Rating [A] | 30 |
| Bifaciality | 70%±10% |

Material Characteristics

| | |
|--------------------|--|
| Dimensions | 2256×1133×35mm (L×W×H) |
| Weight | 32.5kg |
| Frame | Silver anodized aluminum profile |
| Front Glass | High transparency,Antireflection coated,Semi-toughened safety glass, 2.0mm |
| Cell Encapsulation | EVA (Ethylene-Vinyl-Acetate) or POE |
| Back Glass | Glazed & Semi-toughened safety glass, 2.0mm |
| Cells | 12×12 pieces bifacial monocrystalline solar cells series strings |
| Junction Box | IP68, 3 diodes |
| Cable&Connector | Potrait: 500 mm (cable length can be customized) , 1×4 mm 2 , Connector: PV-ZH202B |

Packaging

| | |
|-------------------|------------------|
| Dimensions(L×W×H) | 2290×1125×1253mm |
| Container 20' | 150 |
| Container 40' | 300 |
| Container 40'HC | 600 |

System Design

| | |
|----------------------|---|
| Temperature Range | -40 °C to + 85 °C |
| Withstanding Hail | Maximum diameter of 25 mm with impact speed of 23 m/s |
| Maximum Surface Load | 5,400 Pa |
| Application class | class A |

Dimensions

IV-Curves

