


HT66-166M


Big Size: Cell 166*83

400W / 405W
410W / 415W

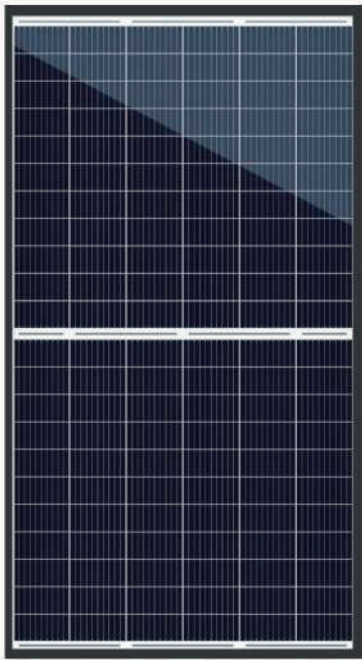

- Module Efficiency: 20.8%
- No. of Cells: 132 (6 × 22)
- Weight: 21.5kg
- Dimensions: 1924mm×1038mm×30mm

MULTIWAY+

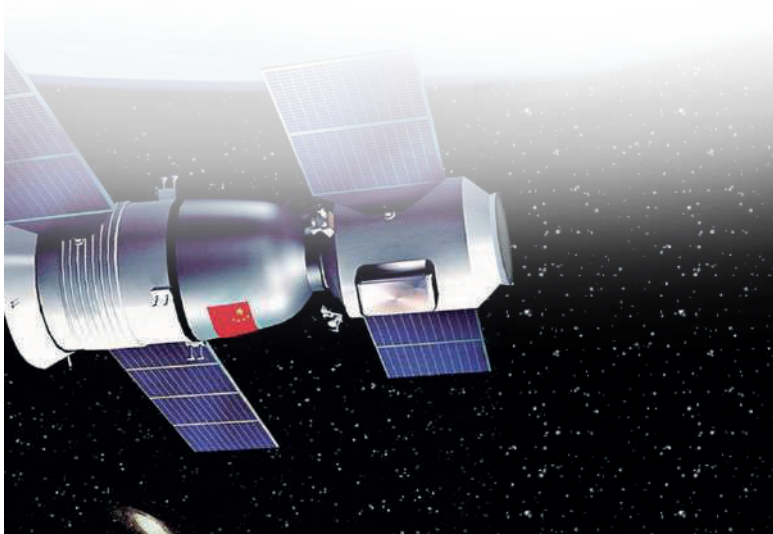

Shanghai Aerospace Automobile
Electromechanical Co., Ltd.
website: www.ht-saae.com.au

Factory :
Lianyungang ShenZhou New Energy Co., Ltd.



Half cut cell technology can reduce the internal power loss and improve component overall power. Excellent heat dissipation avoids hot spot production.



9BB The optimized number and width of main gate lines, Maximize the light receiving area of components and Reduce component power consumption

25Ys
Products
Warranty



Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs

25Ys
Warranty on
power output



All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

EL

Microcrack resistant enhance reliability, triple EL tested of high quality control.

5W

Positive tolerance 0/+5w guaranteed




Entire module certified to with stand extreme wind (2400 Pa) and snow loads (5400 Pa)

PID

PID Resistant

Comprehensive and first-rate certification system

IEC61215: 2016.IEC61730: 2016 Latest Standard
ISO9001, ISO14001 and ISO45001,
meeting the highest international standards
Strict quality control




CEC Listed



Bloomberg
TIER 1

400W/405W/410W/415W

Engineering Drawing

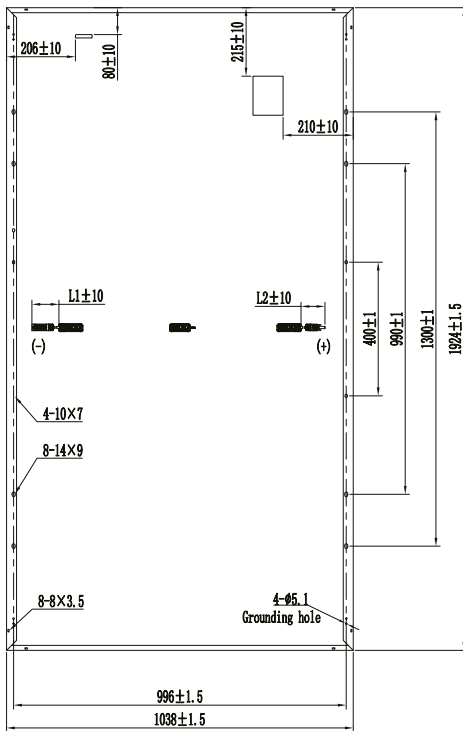

Electrical Characteristics

Module	HT66-166M			
Maximum Power at STC(Pmax)	400W	405W	410W	415W
Open-Circuit Voltage(Voc)	45.5V	45.6V	45.7V	45.8V
Short-Circuit Current(Isc)	11.54A	11.67A	11.80A	11.93A
Optimum Operating Voltage (Vmp)	37.9V	38.0V	38.1V	38.2V
Optimum Operating Current(Imp)	10.56A	10.66A	10.77A	10.88A
Module Efficiency	20.0%	20.3%	20.5%	20.8%
Power Tolerance	0 ~ +5W			
Maximum System Voltage	1000V / 1500V DC(IEC)			
Maximum Series Fuse Rating	20A			
Operating Temperature	-40 °C to +85 °C			

*STC: Irradiance 1000W/m², module temperature 25, AM=1.5
Optional black frame or white frame module according to customer requirements

NMOT

Module	HT66-166M			
Maximum Power	296W	300W	304W	307W
Open Circuit Voltage (Voc)	43.0V	43.1V	43.2V	43.3V
Short Circuit Current (Isc)	9.32A	9.42A	9.53A	9.63A
Maximum Power Voltage (Vmp)	35.8V	35.9V	36.0V	36.1V
Maximum Circuit Current (Imp)	8.27A	8.36A	8.44A	8.50A
NMOT	45°C ±2°C			

*NMOT: Irradiance 800W/m², ambient temperature 20 °C, wind speed 1 m/s

Mechanical Characteristics


Solar Cells	Monocrystalline 166 × 83 mm
No. of Cells	132 (6 × 22)
Dimensions	1924mm×1038mm×30mm
Weight	21.5 kg
Front Glass	High transmission tempered glass
Frame	Anodized aluminium alloy, silver / black frame
Junction Box	IP68
Cable	4mm ² (IEC) Length: (+)200mm,(-)300mm
Connectors	MC Compatible
Packaging Configuration	36pcs / box, 864pcs / 40'HQ Container

Temperature Characteristics

Temperature Coefficient of Pmax	γ (Pm)	-0.39%/K
Temperature Coefficient of Voc	β (Voc)	-0.29%/K
Temperature Coefficient of Isc	α (Isc)	0.049%/K

I-V Curves


Current-Voltage & Power-Voltage Curve

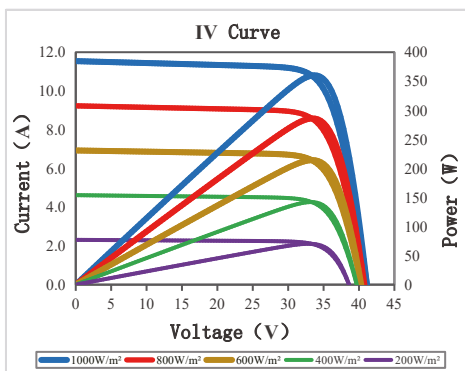

Warranty

- 25-year product warranty
- 25-year warranty on power output

Specific information is referred to the product quality guarantee



Information Box

DS166-003-A1