



# 144HC M10 NTYP SL Bifacial Module

144 Half-Cut Monocrystalline 555W – 585W



## 22.64%

Utilizes the latest M10 size super high efficiency N-type silicon solar cells. Half cut design further reduces cell to module (CTM) losses.

## Stability & Looks

3.2mm fully tempered frontside glass for superior hail resistance. Enhanced frame design to withstand higher wind, snow, and other mechanical stresses. Framed Glass-Backsheet aesthetic is ideal for high visibility

## High Energy Yield


Highest efficiency, Excellent Bifaciality & Low temperature coefficient of N-type Silicon Solar Cells enable High Energy yield

## High Reliability

N-type silicon solar cells result in low LID, reducing annual degradation and guaranteeing more power throughout the lifetime.

## No Compromise Guarantee

15 Year Product Warranty  
25 Year Linear Performance Guarantee

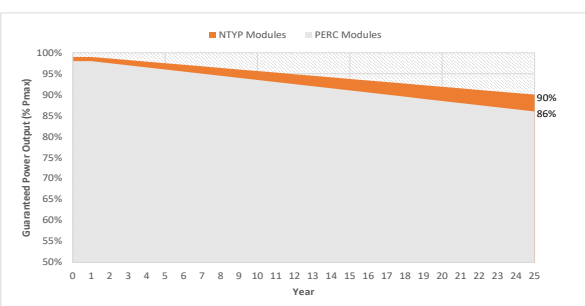

### Highly efficient N-type Silicon Solar Cells

### Low LCOE enabled by High Power Output & Low BOS Cost

### 1% First year degradation & 0.4% Annual Power degradation

#### World-class Quality

- Heliene's fully automated manufacturing facilities with state-of-the-art robotics and computer aided inspection systems ensure the highest level of product quality and consistency
- All manufacturing locations are compliant with international quality standards and are ISO 9001 certified
- Heliene modules have received Top Performer rankings in several categories from PV Evolution Labs (PV EL) independent quality evaluations

#### Bankable Reputation

- Established in 2010, Heliene is recognized as highly bankable Tier 1 manufacturer of solar modules and has been approved for use by the U.S. Department of Defense, U.S. Army Corps of Engineers and from numerous top tier utility scale project debt providers
- By investing heavily in research and development, Heliene has been able to stay on the cutting edge of advances in module technology and manufacturing efficiency


#### Local Sales, Service, and Support

- With sales offices across the U.S. and Canada, Heliene prides itself on unsurpassed customer support for our clients. Heliene has become the brand of choice for many of the leading residential installers, developers and Independent Power Producers due to our innovative technology, product customization capability and just in time last-mile logistics support
- Local sales and customer support means answered phone calls and immediate answers to your technical and logistics questions. We understand your project schedules often change with little warning and endeavor to work with you to solve your project management challenges





Dimensions for 144HC M10 NTYP SL Bifacial Series Modules

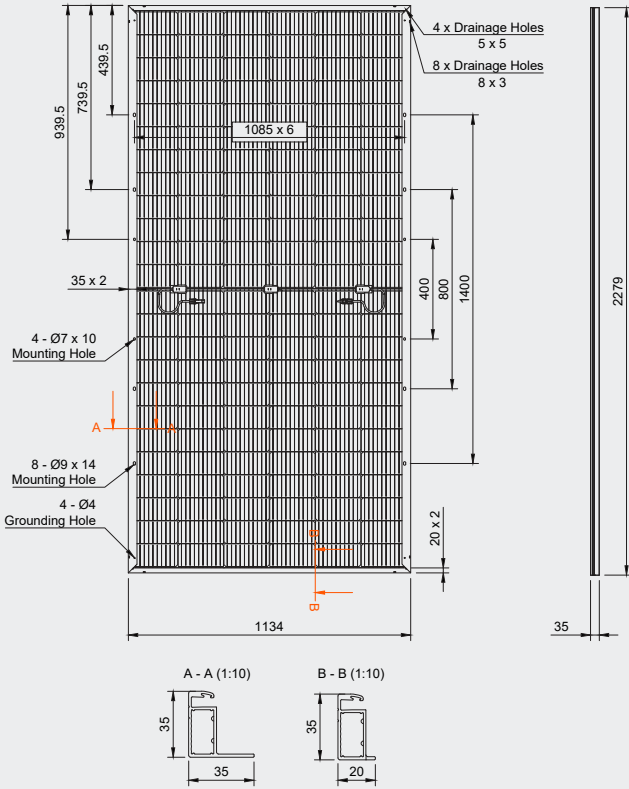

Electrical Data (STC)

Peak Rated Power*	$P_{mpp}$ (W)	585	580	575	570	565	560	555
Maximum Power Voltage	$V_{mpp}$ (V)	43.81	43.62	43.37	43.13	42.88	42.63	42.39
Maximum Power Current	$I_{mpp}$ (A)	13.36	13.32	13.28	13.24	13.20	13.16	13.12
Open Circuit Voltage*	$V_{oc}$ (V)	51.79	51.65	51.51	51.37	51.24	51.09	50.95
Short Circuit Current**	$I_{sc}$ (A)	14.14	14.10	14.06	14.02	13.99	13.95	13.91
Module Efficiency	Eff (%)	22.64	22.44	22.25	22.06	21.86	21.67	21.48
Maximum Series Fuse Rating	MF (A)	30	30	30	30	30	30	30

Power Sorting Range [- 0/+3%]  
 Bifaciality Factor\*\*\*  $80 \pm 5\%$

STC - Standard Test Conditions: Irradiation 1000 W/m<sup>2</sup> - Air mass AM 1.5 - Cell temperature 25 °C,  
 \* $P_{mpp}$  Production Tolerance  $\pm 3\%$ ,  $V_{oc}$  Production Tolerance  $\pm 3\%$ ,  $I_{sc}$  Production Tolerance  $\pm 4\%$   
 \*\*\*Bifaciality Factor=  $P_{mpp_{rear}}/P_{mpp_{front}}$  where  $P_{mpp_{rear}}$  and  $P_{mpp_{front}}$  are tested at STC

Electrical Data (NMOT)

Maximum Power	$P_{mpp}$ (W)	444	440	437	433	429	425	421
Maximum Power Voltage	$V_{mpp}$ (V)	41.95	41.77	41.53	41.30	41.06	40.82	40.59
Maximum Power Current	$I_{mpp}$ (A)	10.59	10.54	10.51	10.48	10.45	10.42	10.38
Open Circuit Voltage	$V_{oc}$ (V)	49.59	49.45	49.32	49.19	49.06	48.92	48.78
Short Circuit Current	$I_{sc}$ (A)	11.40	11.37	11.33	11.30	11.28	11.25	11.21

NMOT - Nominal Module Operating Temperature:  
 Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind speed 1m/s

Mechanical Data

Solar Cells	144 Half Cut, M10x, N-type Cells
Module Construction	Framed Glass-Backsheet
Backsheet	Transparent Backsheet with White Pattern
Dimensions (L x W x D)	2279 x 1134 x 35 mm (89.72 x 44.65 x 1.38 inch)
Weight	29.2 kg (64.3 lbs)
Frame	Double Webbed 15-Micron Anodized Aluminum Alloy
Glass	3.2mm Fully Tempered, High-Transmission, PV Solar Glass with Anti Reflective Coating
Junction Box	IP-68 rated with 3 bypass diodes
Output Cables	4mm <sup>2</sup> (12 AWG), 0.3-meter Symmetrical Cables
Connectors	Multi-Contact/ Stäubli MC4

Certifications

UL Certification UL61215, UL61730, CSA C22.2 No. 61730

Temperature Ratings

Nominal Module Operating Temperature (NMOT)	+42°C ( $\pm 2^\circ\text{C}$ )
Temperature Coefficient of $P_{max}$	-0.30%/°C
Temperature Coefficient of $V_{oc}$	-0.25%/°C
Temperature Coefficient of $I_{sc}$	0.045%/°C

Maximum Ratings

Operational Temperature	-40°C to +85°C
Max System Voltage	1500V
Mech. Load Test (Front)	113 psf / 5400 Pa
Mech. Load Test (Back)	50 psf / 2400 Pa
Fire Type	Type 1

Warranty

15 Year Product Warranty
25 Year Linear Power Guarantee

Packaging Configuration

Modules per Pallet 40' Container:	31 pieces
Modules per 40' Container:	620 pieces
Modules per Pallet 53' Trailer:	28 pieces
Modules per 53' Trailer:	644 pieces

I-V Curves for 144HC M10 NTYP SL Bifacial Series Modules

