



RAIL-BASED MOUNT FOR STANDING SEAM ROOFS

SimpleBlock®-U has a streamlined design that offers a lightweight yet durable solution for mounting a variety of brackets to a standing seam roof. Two oval-point set screws are pre-installed, saving time on installation and eliminating the need to penetrate the roof.

FEATURES & BENEFITS

- Install on vertical, double-lock standing seam profiles
- No roof penetrations required
- North-South adjustability
- Conforms to UL 2703

TWO PRE-INSTALLED SET SCREWS FOR EASY ATTACHMENT OF ANY BRACKET














SIMPLEBLOCK-U RAIL-BASED MOUNT FOR STANDING SEAM ROOFS



	PRODUCT IMAGE	PART NUMBER	PART DESCRIPTION	BOX QUANTITY	PALLET QUANTITY
	ASSEMBLED WITH (2)	SS SET SCREWS OP 3/8"-24X7	/8", (1) SS HEX TAP BOLT 5/16"-	18X1.25" AND (1) SS F	HEX NUT 5/16"-18
MOUNT		3014011	SIMPLEBLOCK-U MOUNT AL	50	4800

	INCLUDES (1) 3/8"-16 X 1 1/4" HEX BOLT AND (1) 3/8"-16 FLANGE NUT FOR RACKING					
		2012022	CF UNIV L-FOOT MLL 3" (NO HARDWARE NEEDED)	50	1800	
ETS		3011018	L-F00T SCL-101 BLK 3"	50	6000	
BRACKETS		3011015	L-F00T L-102 BLK 3"	50	6000	
		3011017	L-F00T SCL-101 MLL 3"	50	6000	
		3011016*	L-F00T L-102 MLL 6"	50	2400	

* SPECIAL ORDER ITEM

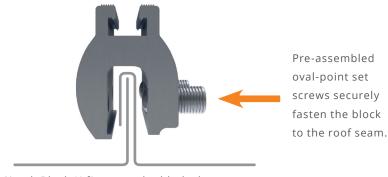

SimpleBlock-U fits most double-lock standing seam profiles

SIMPLEBLOCK-U



CHOOSE YOUR BRACKET:







SIMPLEBLOCK-U IS ALSO COMPATIBLE WITH THIRD-PARTY BRACKETS

