

# RUNERGY

## TIER 1 HY-DH108N8B 425-445W

**22.8%** Max. Efficiency    **N-Type** Bifacial & Dual Glass    **108 Pieces** Half-Cell



### High Conversion Efficiency

Module efficiency up to 22.8% based on N-Type wafer and advanced N-Type cell technology



### Excellent Energy Yield

More power output in field operation due to better thermal behaviors, weak-light performance and bifaciality







### Outstanding Anti-degradation

Unsusceptible to LID, LeTID and less annual degradation due to special characteristics of N-Type



### Quality Guarantee

High module quality ensures long-term reliability

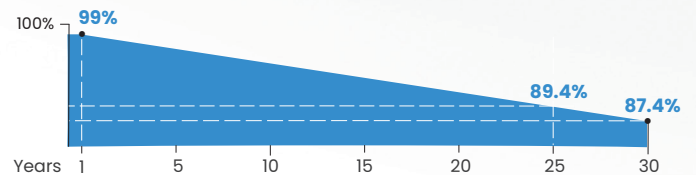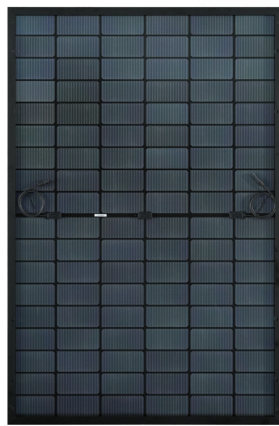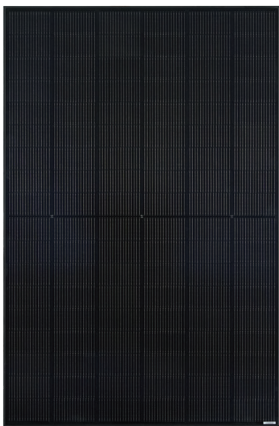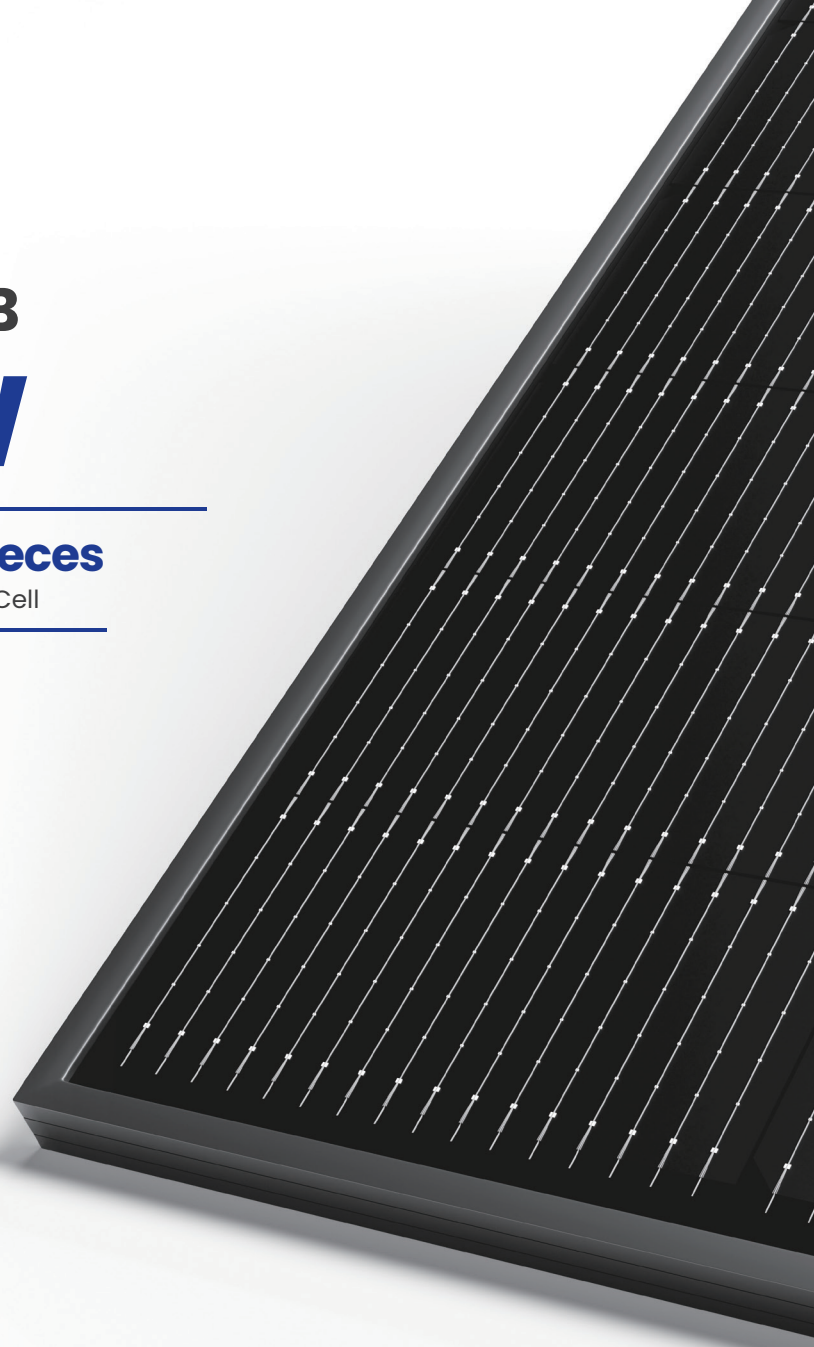

Runergy N-Type Dual Glass Product Performance Warranty

• 1st year degradation < 1%, annual degradation < 0.4%

**25** 25-year product warranty

**30** 30-year linear power warranty

IEC61215 / IEC61730 / UL61730 / IEC61701 / IEC62716 / IEC60068 / ISO9001 / ISO14001 / ISO45001




www.runergy.com  
sales-inform@runergy.com

## Mechanical Parameters

Solar Cell	Mono N-Type 182mm
No. of Cells	108 (6 × 18)
Dimensions	1722 × 1134 × 30mm (67.80 × 44.65 × 1.18in)
Weight	24.2kg (53.35lbs)
Junction Box	IP68 rated (3 bypass diodes)
Output Cable	4mm <sup>2</sup> (IEC), 12 AWG (UL) ±1200mm (47.24in.) or customized
Connector	EVO2 or similar
Front Cover	2.0mm AR coated heat-strengthened glass
Back Cover	2.0mm heat-strengthened glass
Frame	Black/Silver anodized aluminum
Container	36 pcs/Pallet, 936 pcs/40' HQ (Global) ,756 pcs/40' HQ (US)

Unit: mm (inch)

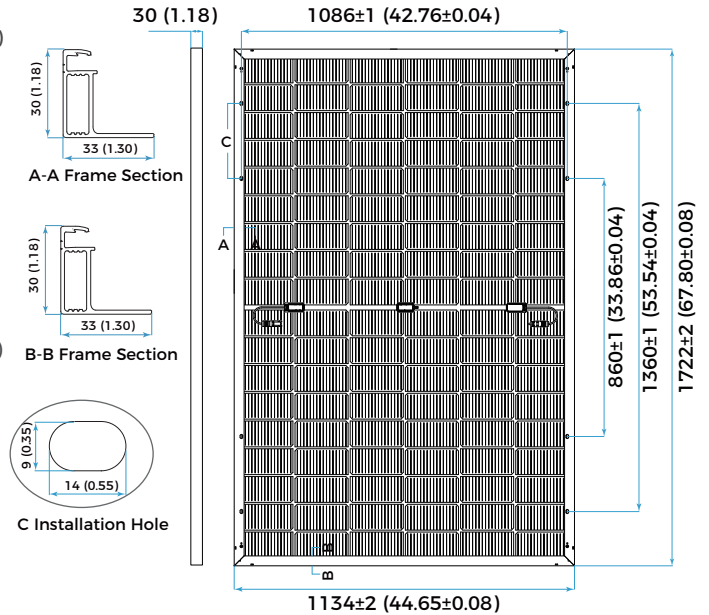

## Operating Parameters

Max. System Voltage	DC 1500V (IEC/UL)
Operating Temperature	-40 °C ~ +85 °C (-40°F ~ +185°F)
Max. Fuse Rating	30A
Frontside Max. Loading	5400Pa (112lb/ft <sup>2</sup> )
Backside Max. Loading	2400Pa (50lb/ft <sup>2</sup> )
Bifaciality	80%±5%
Fire Resistance	IEC Class A/ UL type 29

## Electrical Characteristics - STC

Irradiance 1000 W/m<sup>2</sup>, cell temperature 25 °C, AM-1.5, Test uncertainty for Pmax: ±3%

	445	440	435	430	425
Maximum Power at STC (Pmax/W)	445	440	435	430	425
Power Tolerance (W)	0 ~ +5				
Optimum Operating Voltage (Vmp/V)	33.39	33.21	33.03	32.85	32.67
Optimum Operating Current (Imp/A)	13.33	13.25	13.17	13.09	13.01
Open Circuit Voltage (Voc/V)	39.35	39.16	38.97	38.78	38.59
Short Circuit Current (Isc/A)	13.96	13.88	13.80	13.72	13.64
Module Efficiency	22.8%	22.5%	22.3%	22.0%	21.8%

## Electrical Characteristics - BNPI

Irradiance: front 1000W/m<sup>2</sup>, rear 135W/m<sup>2</sup>, Cell temperature 20 °C, AM-1.5.


	490	484	479	473	468
Maximum Power at BNPI(Pmax/W)	490	484	479	473	468
Optimum Operating Voltage (Vmp/V)	33.39	33.21	33.03	32.85	32.67
Optimum Operating Current (Imp/A)	14.67	14.58	14.49	14.41	14.32
Open Circuit Voltage (Voc/V)	39.45	39.26	39.07	38.88	38.68
Short Circuit Current (Isc/A)	15.39	15.30	15.21	15.12	15.04

## Rearside Power Gain (Reference to 440W Front)

	5%	15%	25%
Rearside Power Gain	5%	15%	25%
Maximum Power (Pmax/W)	462	506	550
Optimum Operating Voltage (Vmp/V)	33.21	33.31	33.31
Optimum Operating Current (Imp/A)	13.91	15.19	16.51
Open Circuit Voltage (Voc/V)	39.16	39.26	39.26
Short Circuit Current (Isc/A)	14.57	15.92	17.30
Module Efficiency	23.7%	25.9%	28.1%

## Temperature Characteristics

Nominal Module Operating Temperature	42 ± 2 °C
Nominal Cell Operating Temperature	45 ± 2 °C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.045%/°C

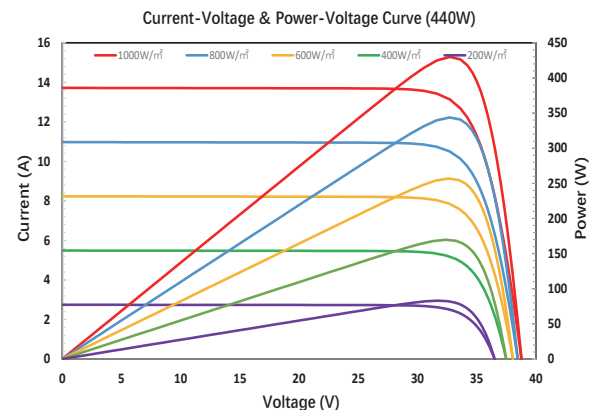

©Copyright 2025 RUNERGY  
HY-DH108N8B-Global-Ver25Q1